


Qubig GmbH  
Greimelstr. 26  
83236 Übersee  
Germany

tel: +49 8642 2449064  
fax: +49 8642 2447063

email: [vogt@qubig.de](mailto:vogt@qubig.de)  
web: [www.qubig.com](http://www.qubig.com)

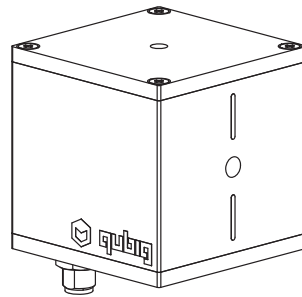

## Test Data Sheet

EO-Na23M3  
S/N F8159


High-Q, tunable resonant electro-optic modulator

Parameter	Value	Unit
Resonance Frequency	1.64-1.79	GHz
Bandwidth	8.3	MHz
EO crystal	MgO:LiNbO <sub>3</sub>	
Damage Threshold	2	W/mm <sup>2</sup>
AR coating	380-780	nm
Modulation at 671nm	0.12	rad/V

# Modulation Performance:


## Measured Modulation:

### Test setup

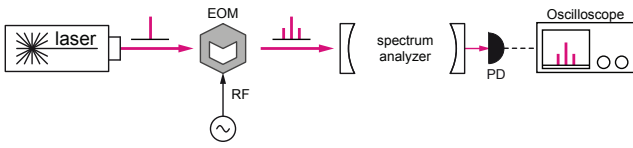



### Parameters

RF input power	$RF_{in}$	28.7	dBm
Test wavelength	$\lambda_{test}$	671	nm
Resonance frequency	$f_0$	1717	MHz

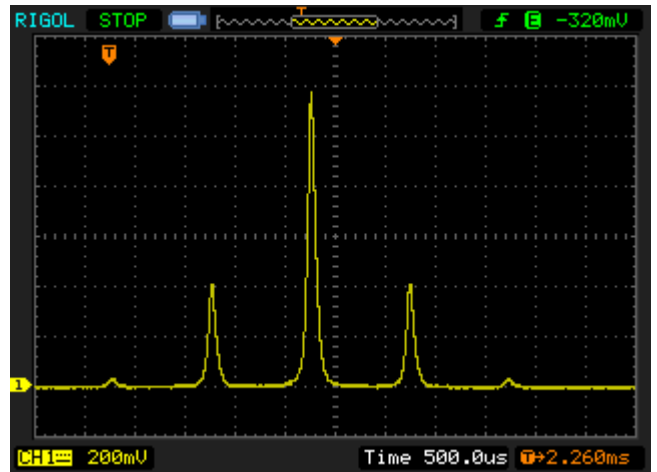


Oscilloscope screenshot

## Numbers & Conversions:

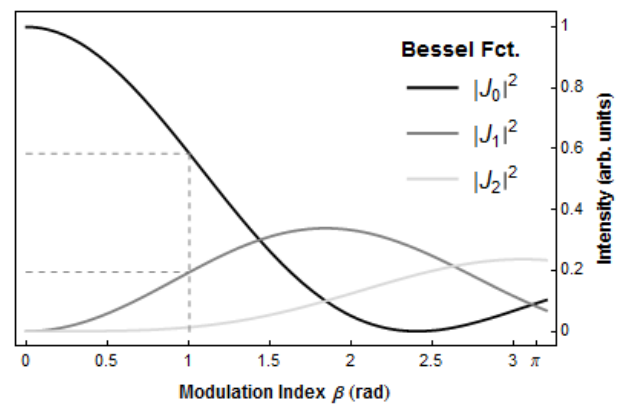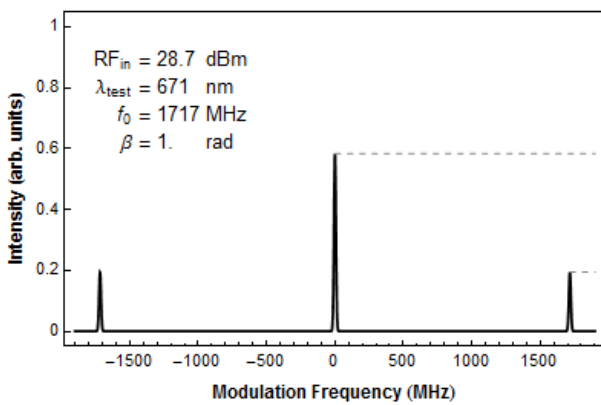


$\beta=1. \text{rad}$	unit	$\lambda_1$	$\lambda_2$
Parameter	nm	589	671
$V_{peak}$	V	7.4	8.6
$V_{rms}$	V	5.2	6.1
P	dBm	27.3	28.7
P	mW	542	741
$V_\pi$	V	23.	27.
$\beta/V_{peak}$	rad/V	0.14	0.12

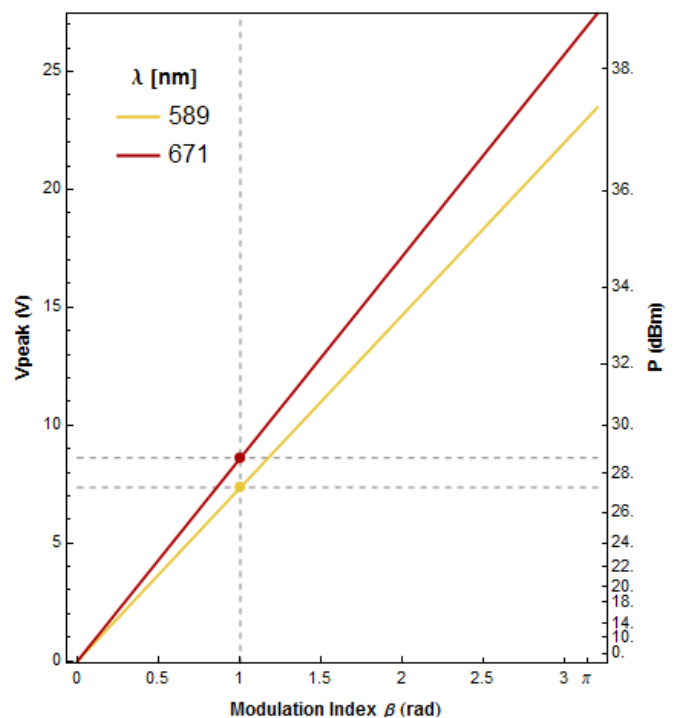


## Tuning Performance:

- ccw tuning: frequency  $\uparrow$
- max number of turns: 4.5
- RFin = 28.7 dBm

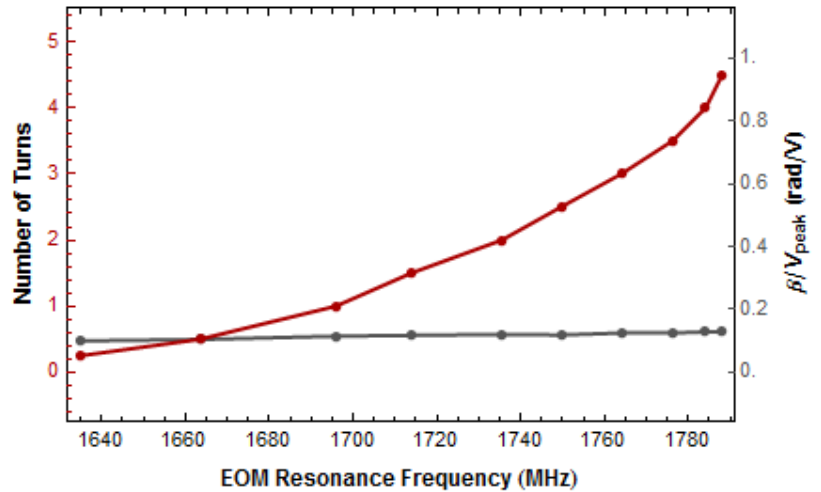



## Bandwidth:

- Radio frequency tuning at a fixed resonance frequency  $f_0$ .
- The Bandwidth (FWHM) is extracted from a Lorentzian fit applied to the modulation index variation as a function of the RF drive frequency.

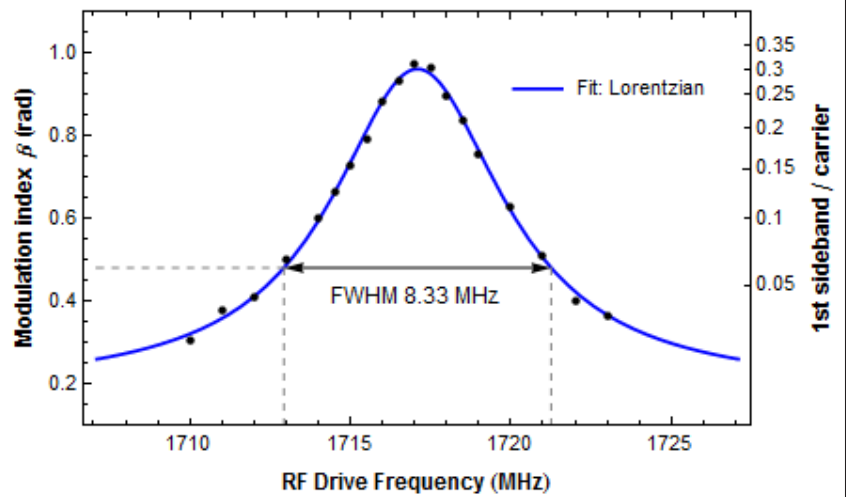


## Return loss:

### Test Setup

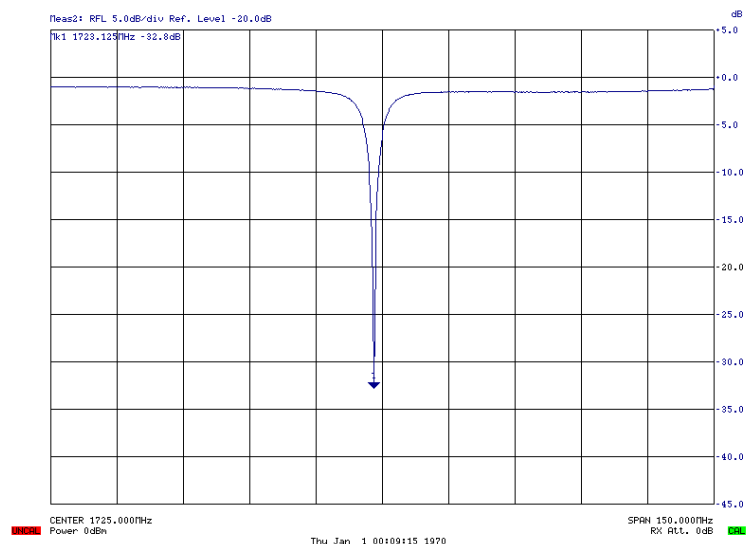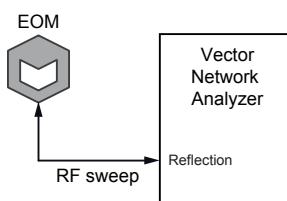

## Package Drawing:

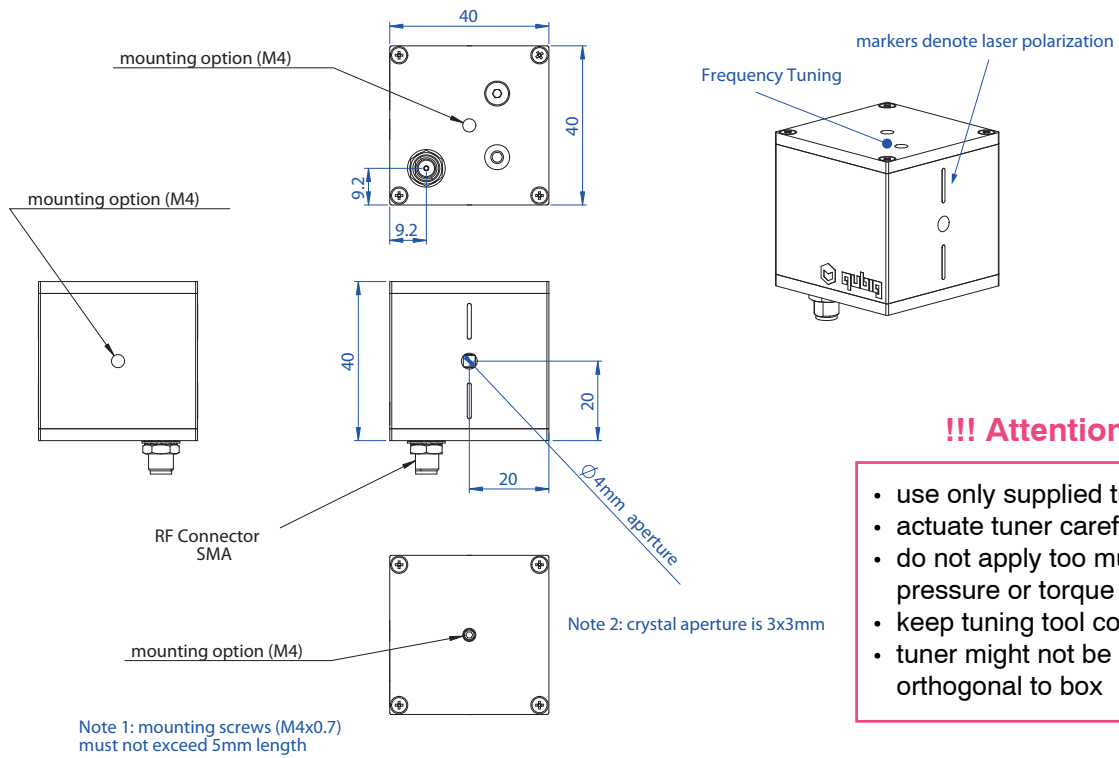

### !!! Attention !!!

- use only supplied tuning tool
- actuate tuner carefully
- do not apply too much pressure or torque
- keep tuning tool coaxial
- tuner might not be perfectly orthogonal to box

Tested by:

Date:

\_\_\_\_\_

\_\_\_ / \_\_\_ / \_\_\_