

## Test Data Sheet

### PM9 - NIR


(EO-T2700M3-VIS)

S/N:

### Resonant electro-optic phase modulator

with

- tunable resonance frequency
- temperature sensor (NTC)
- thermal crystal mount

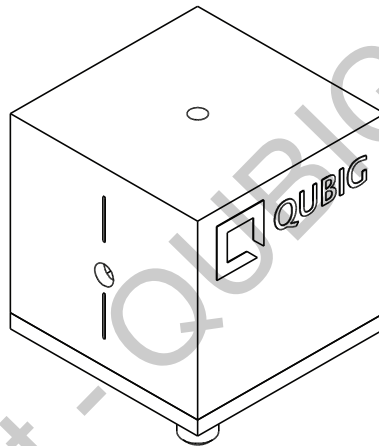


RF properties	Value	Unit
Resonance frequency: $f_0$ <sup>1)</sup>	2.38 - 2.78	GHz
Preset frequency: $f_{set}$ <sup>1)</sup>	2726	MHz
Bandwidth: $\Delta\nu$	6.9	MHz
Quality factor: Q	395	
Required RF power for 1rad @ 780nm <sup>2)</sup>	34.0	dBm
max. RF power (w/ active T-ctrl.): $RF_{max}$ <sup>3)</sup>	10	W

Optical properties		
EO crystal	MLN	
Aperture	3x3	mm <sup>2</sup>
Wavefront distortion (633nm)	$\lambda/4$	nm
recommended max. optical intensity (780nm)	<10	W/mm <sup>2</sup>
AR coating ( $R_{avg} < 0.5\%$ )	532 - 1064	nm


<sup>1)</sup> at 22.3°C   <sup>2)</sup> with 50Ω termination   <sup>3)</sup> w/o external active cooling

# Measured modulation

**Fig. 1: Oscilloscope trace**

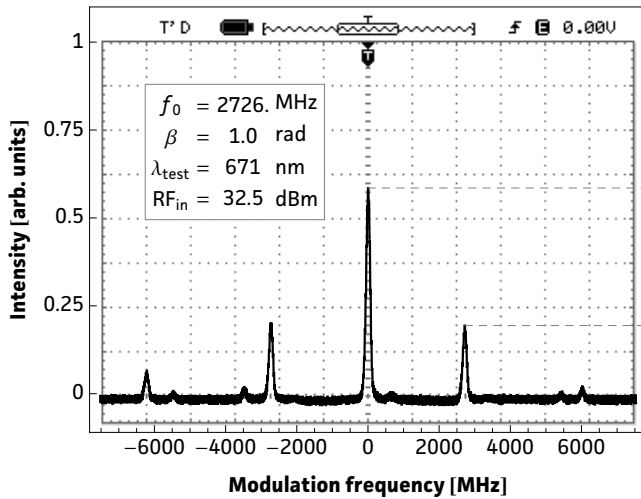

**Fig. 2: Carrier/sideband ratio**

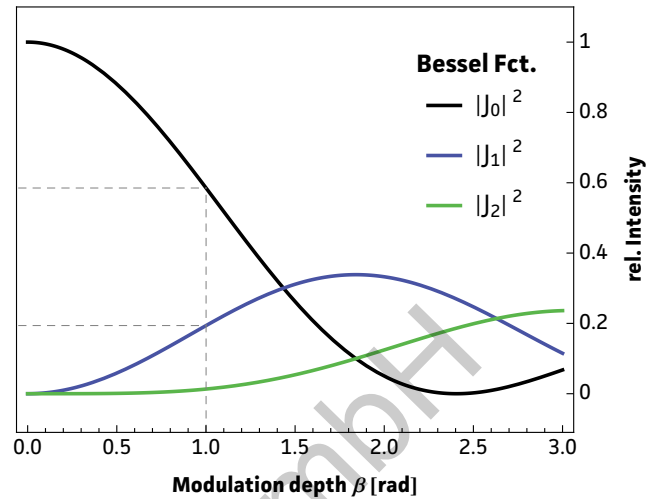

**Table 1: Expected modulation**


$\beta = 1 \text{ rad}$	unit	$\lambda_1$	$\lambda_2$
$\lambda$	nm	<b>671</b>	<b>780</b>
P	dBm	32.5	34.
P	W	1.78	2.51
U	$V_p$	13.3	15.8
$U_\pi$	$V_p$	41.9	49.8
$\beta / U$	rad / V	0.08	0.06

**Fig.1:** Recorded oscilloscope trace retrieved from a test setup as illustrated below.


**Fig.2:** Squared absolute values of first-kind Bessel functions vs. modulation depth. Vertical lines reveal the ratio between the carrier  $|J_0|^2$  and the  $i^{\text{th}}$  sideband  $|J_i|^2$  at a specific  $\beta$ .

**Fig.3:** Dependency between RF amplitude and modulation depth for different wavelengths. Points on the curve allow to retrieve either the required RF amplitude for a specific/desired  $\beta$  or the max. achievable modulation depth for a given/available RF power.


**Table 1:** Expected RF-amplitude/-power values and conversion factors for the required wavelength at the reference modulation depth of 1 rad. **Note:** Experimentally recorded modulation depth displayed in Fig.1 might vary from the respective values ( $\beta=1\text{rad}$ ) provided in the table.

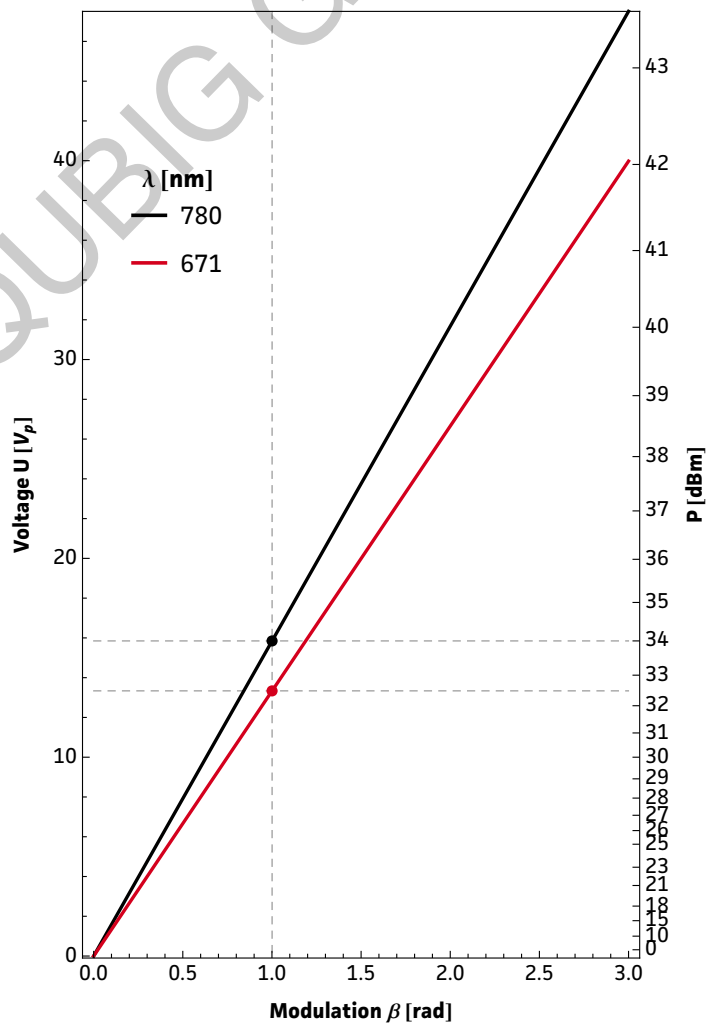


**Fig. 3: RF-signal amplitude vs. modulation depth**

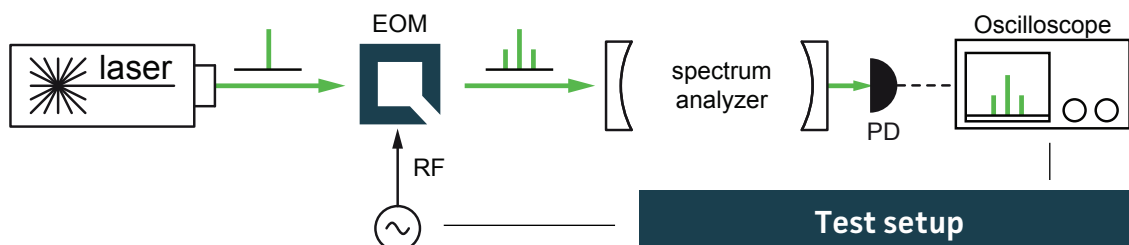

## Resonance characteristics

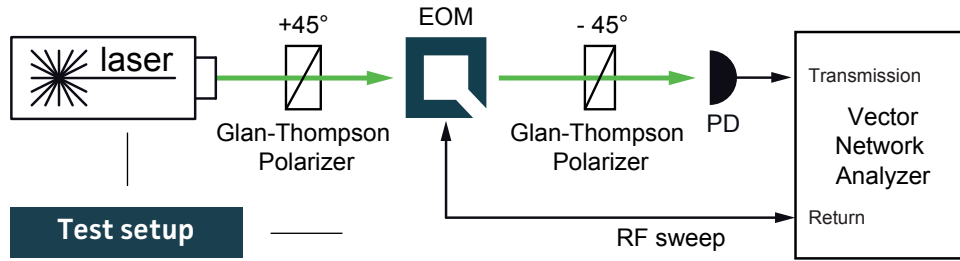


10/6/2016 10:58:19 AM  
1328.5170K92-100178-XI

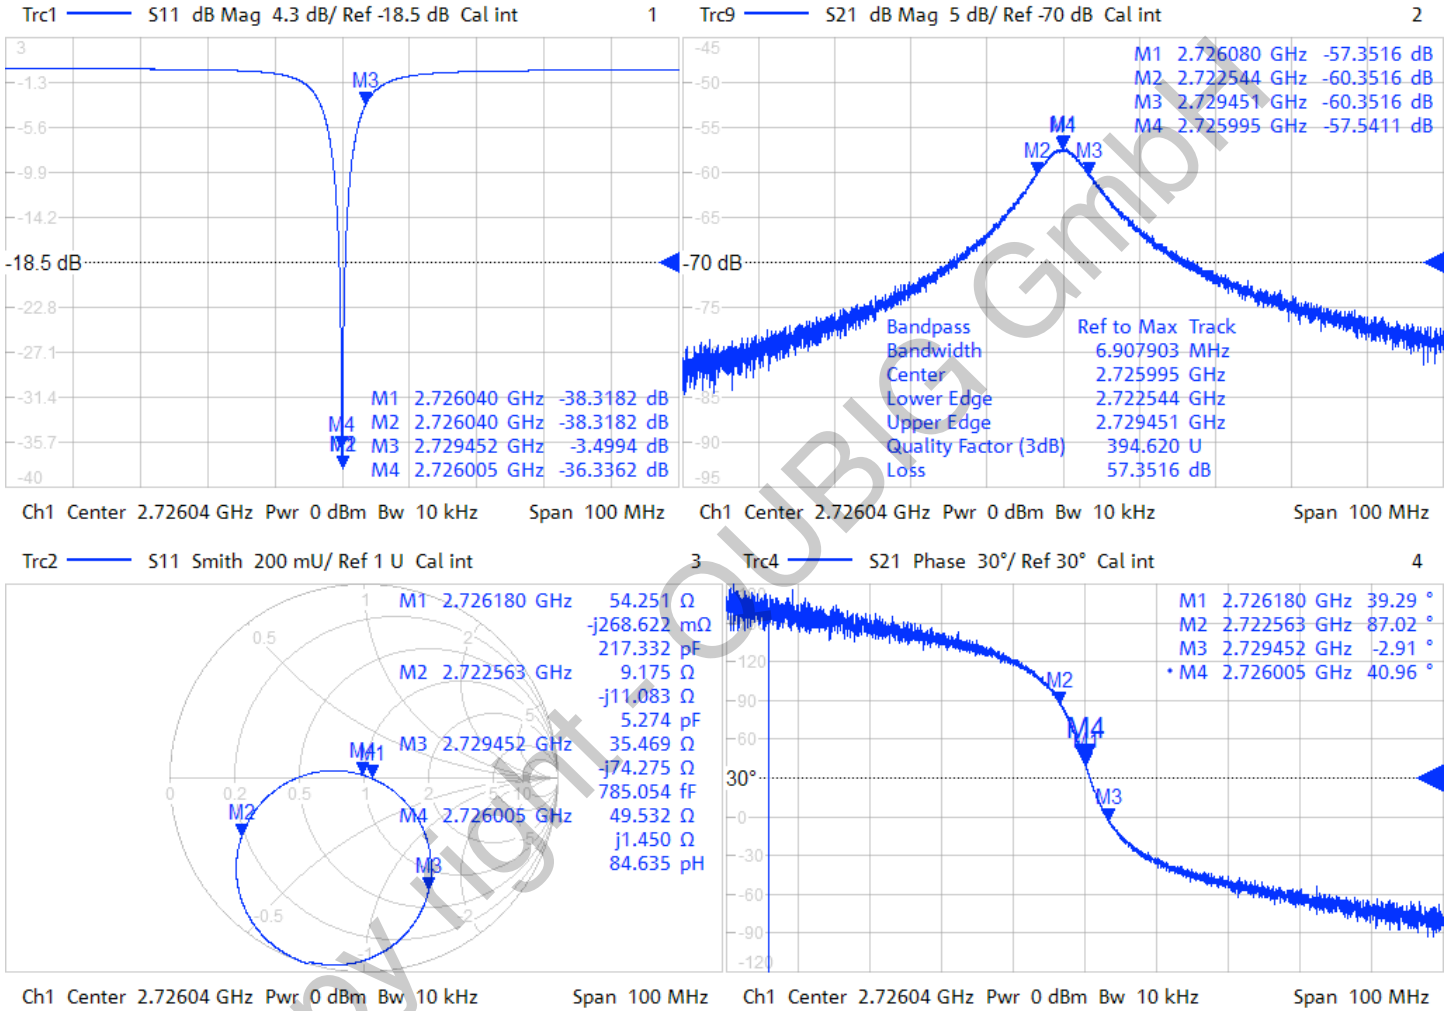

## Tuning performance

MAX resonance frequency	$f_0 \text{ max}$	2778	MHz
MIN resonance frequency	$f_0 \text{ min}$	2383	MHz
number of turns	$N_{\text{max}}$	5	
counter clock-wise turns ↻	higher $f_0$ ↑		
clock-wise turns ↻	lower $f_0$ ↓		





- use only supplied tuning tool
- actuate tuner carefully
- do not apply too much pressure or torque
- keep tuning tool coaxial
- tuner might not be perfectly orthogonal to box

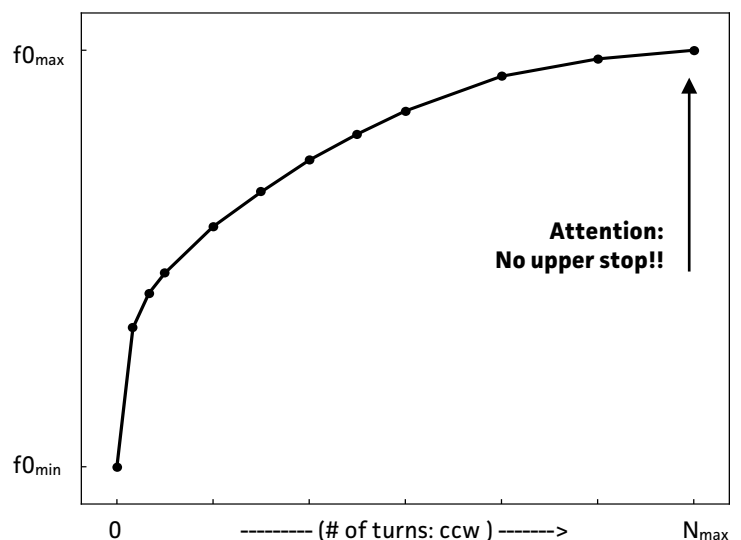



# Handling instructions

- Input laser polarization must be aligned with respect to the white markers on the housing
- Please handle device carefully. Avoid shock. Don't drop.
- After turn on the resonance frequency might drift slightly with applied RF power. Please compensate by tuning the RF drive frequency until steady-state (~min).

# Package drawing

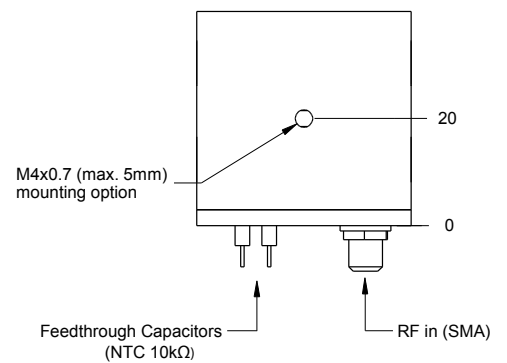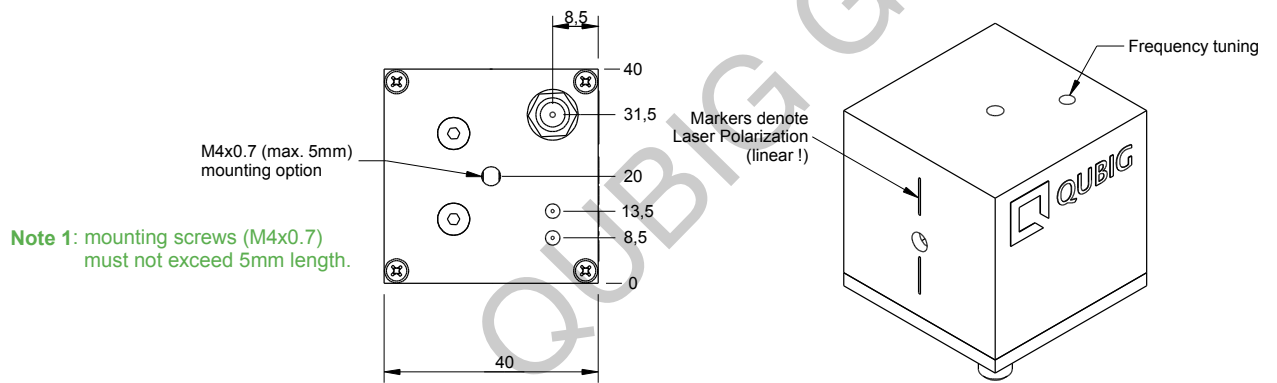

use this side for heat sinking

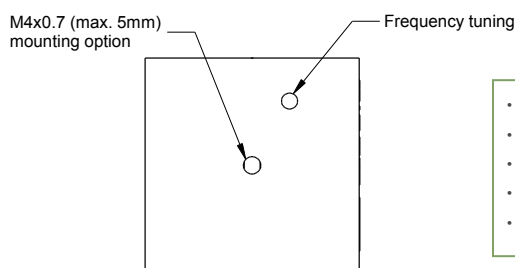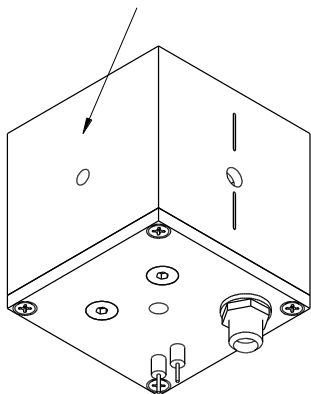

### Attention!!

- use only supplied tuning tool
- actuate tuner carefully
- do not apply too much pressure or torque
- keep tuning tool coaxial
- tuner might not be perfectly orthogonal to box

## TXC-option information


### Delivery contents:

- TEC for active T-ctrl. (additional T-controller required)
- SMD capacitor: 1x 47uF - C1210C476M4PACTU
- Thermally insulating screw: M4, 1pc.
- Thermal pads: 2x, double sided adhesive (50x50mm<sup>2</sup>)

### NTC characteristics

NTC part number	Resistance (25°C) (ohm)	B-Constant (25-50°C) (K)	Operating Current for Sensor (25°C) (mA)	Rated Electric Power (25°C) (mW)	Typical Dissipation Constant (25°C) (mW/°C)	Thermal Time Constant (25°C) (s)
NXFT15XH103FA2B050	10k +/- 1%	3380 +/- 1%	0.12	7.5	1.5	4


- Operating Current for Sensor rises Thermistor's temperature by 0.1°C
- Rated Electric Power shows the required electric power that causes Thermistors's temperature to rise to 30°C by self heating, at ambient temperature of 25°C.

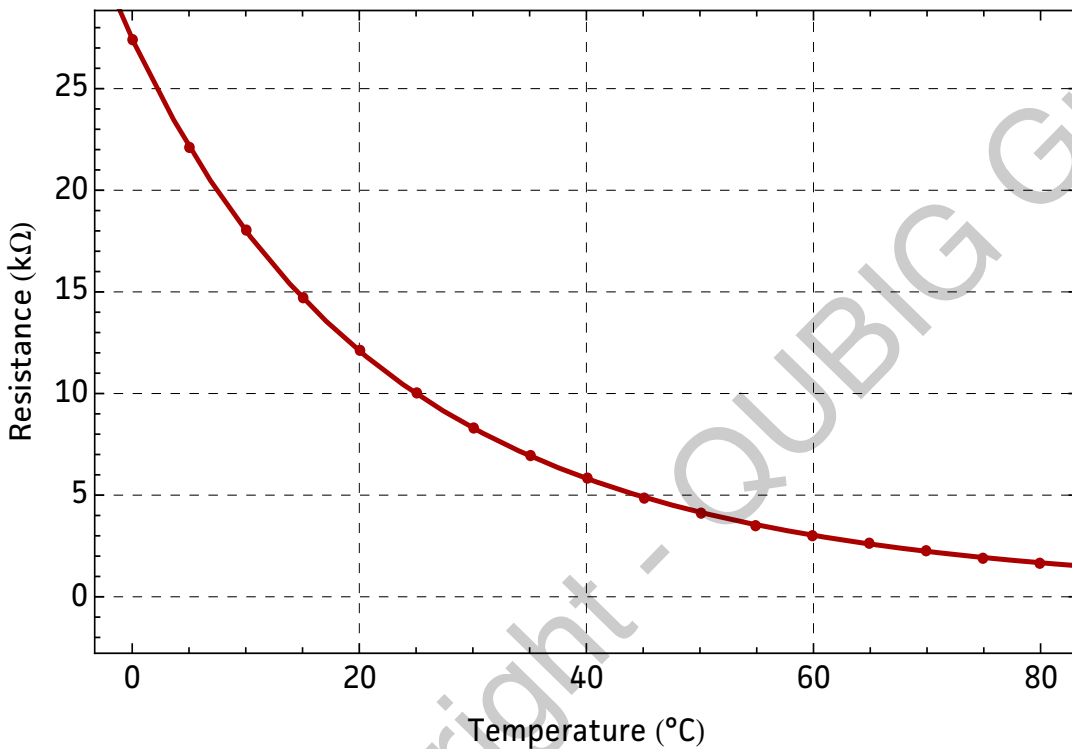

Part Number	NXFT15XH103
Resistance	10kΩ
B-Constant	3380K
Temp. (°C)	Resistance (kΩ)
-40	197.388
-35	149.395
-30	114.345
-25	88.381
-20	68.915
-15	54.166
-10	42.889
-5	34.196
0	27.445
5	22.165
10	18.010
15	14.720
20	12.099
25	10.000
30	8.309
35	6.939
40	5.824
45	4.911
50	4.160
55	3.539
60	3.024
65	2.593
70	2.233
75	1.929
80	1.673
85	1.455
90	1.270
95	1.112
100	0.976
105	0.860
110	0.759
115	0.673
120	0.598
125	0.532

### TEC characteristics

TEC part number	I <sub>max</sub> (A)	U <sub>max</sub> (V)	Q <sub>cmax</sub> (W)	ΔT <sub>max</sub> (K)	T <sub>max</sub> (°C)	A (mm)	B (mm)	H (mm)	ID (mm)	Sealing
UEPT-440-127-040M125S	4.0	15.2	40	67.0	125.0	40.0	40.0	4.6	4.5	Silicon

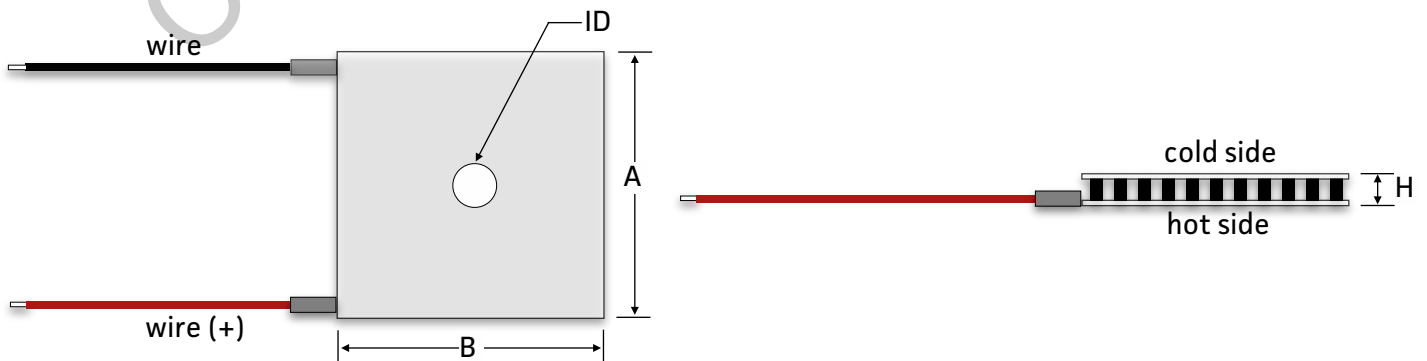

Tested by:

Tel: +49 89 2302 9101  
 Fax: +49 89 2302 9102  
 eMail: [mail@qubig.com](mailto:mail@qubig.com)  
 web: [www.qubig.com](http://www.qubig.com)

**QUBIG GmbH**  
 Balanstr. 57  
 81541 München  
 Germany