




Test Data Sheet

PM-Rb87_3.4M3

(old: EO-F3417M3-NIR)

S/N:

Resonant electro-optic phase modulator with - TXC option

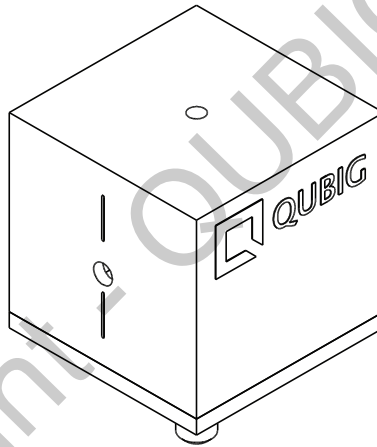

RF properties	Value	Unit
Resonance frequency: f_0 ¹⁾	3.424	GHz
Bandwidth: $\Delta\nu$	5.6	MHz
Quality factor: Q	611	
Required RF power for 1rad @ 795nm ²⁾	32.0	dBm
max. RF power: RF_{max} ³⁾	3	W
max. operating Temperature	65	°C

Optical properties		
EO crystal	MLN	
Aperture	3x3	mm ²
Wavefront distortion (633nm)	$\lambda/4$	nm
recommended optical intensity (795nm)	<1	W/mm ²
AR coating (R<0.5%)	630 - 1100	nm

¹⁾ at 25°C ²⁾ with 50Ω termination ³⁾ no damage with $RF_{in} < 5W$

Measured modulation

Fig. 1: Oscilloscope trace

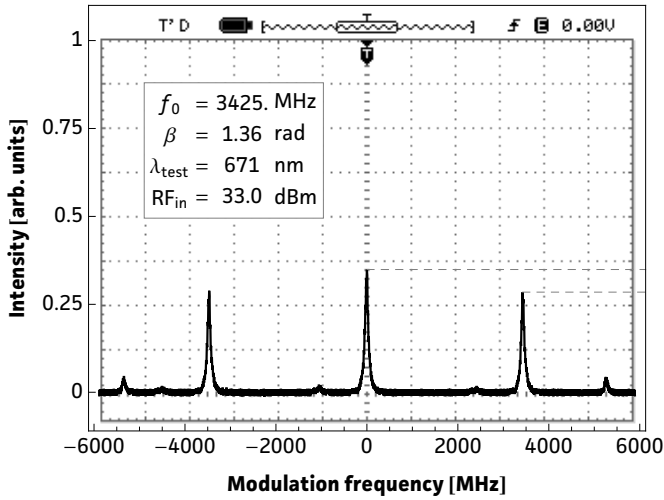


Fig. 2: Carrier/sideband ratio

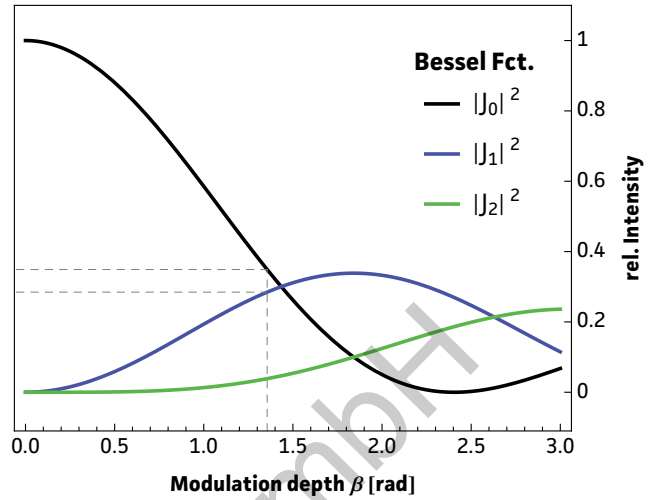


Table 1: Expected modulation

$\beta = 1$ rad	unit	λ_1	λ_2
λ	nm	671	795
P	dBm	30.4	32.
P	W	1.09	1.6
U	V_p	10.4	12.6
U_π	V_p	32.7	39.8
β / U	rad / V	0.1	0.08

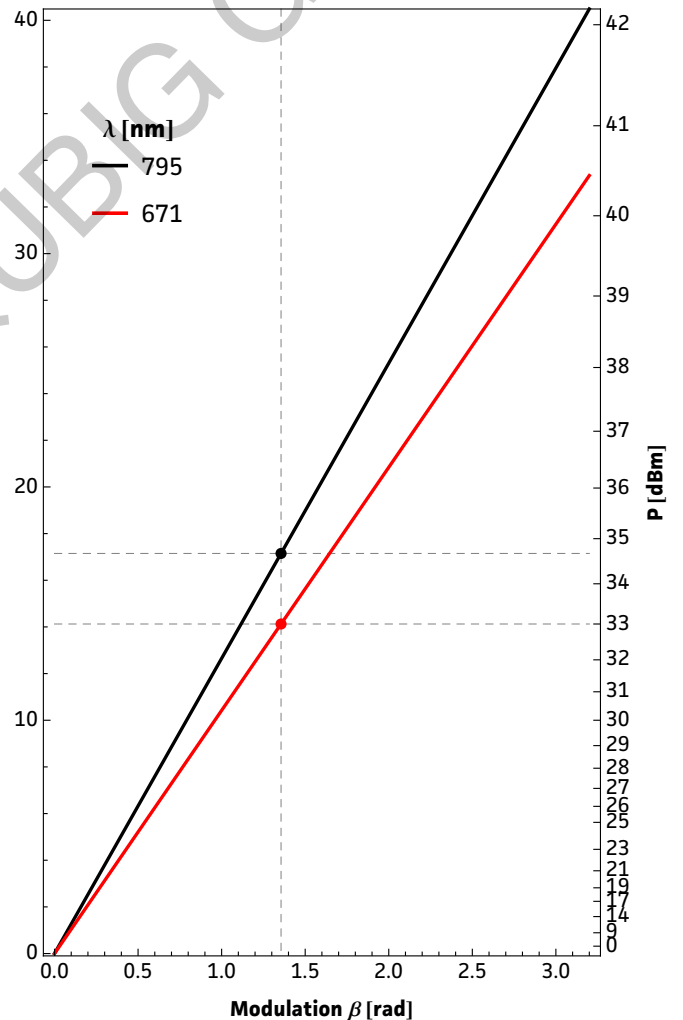



Fig.1: Recorded oscilloscope trace retrieved from a test setup as illustrated below.

Fig.2: Squared absolute values of first-kind Bessel functions vs. modulation depth. Vertical lines reveal the ratio between the carrier $|J_0|^2$ and the i^{th} sideband $|J_i|^2$ at a specific β .

Fig.3: Dependency between RF amplitude and modulation depth for different wavelengths. Points on the curve allow to retrieve either the required RF amplitude for a specific/desired β or the max. achievable modulation depth for a given/available RF power.


Table 1: Expected RF-amplitude/-power values and conversion factors for the required wavelength at the reference modulation depth of 1 rad.

Fig. 3: RF-signal amplitude vs. modulation depth


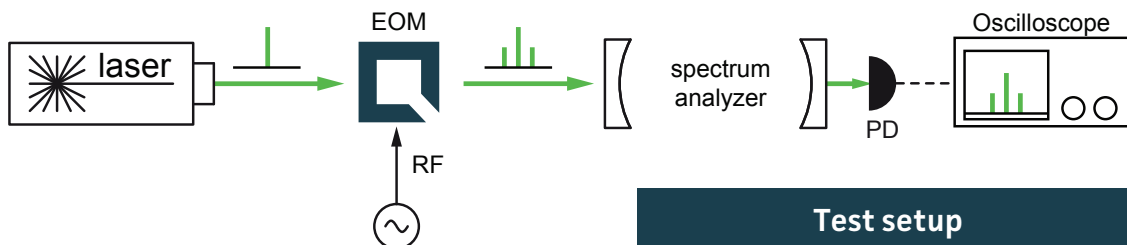


Test setup

Resonance characteristics

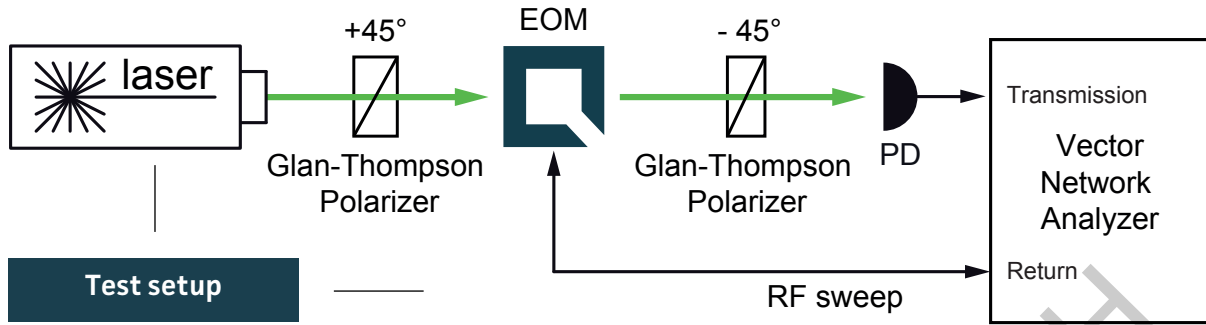


9/6/2017 11:38:22 AM
1328.5170K92-100178-XI

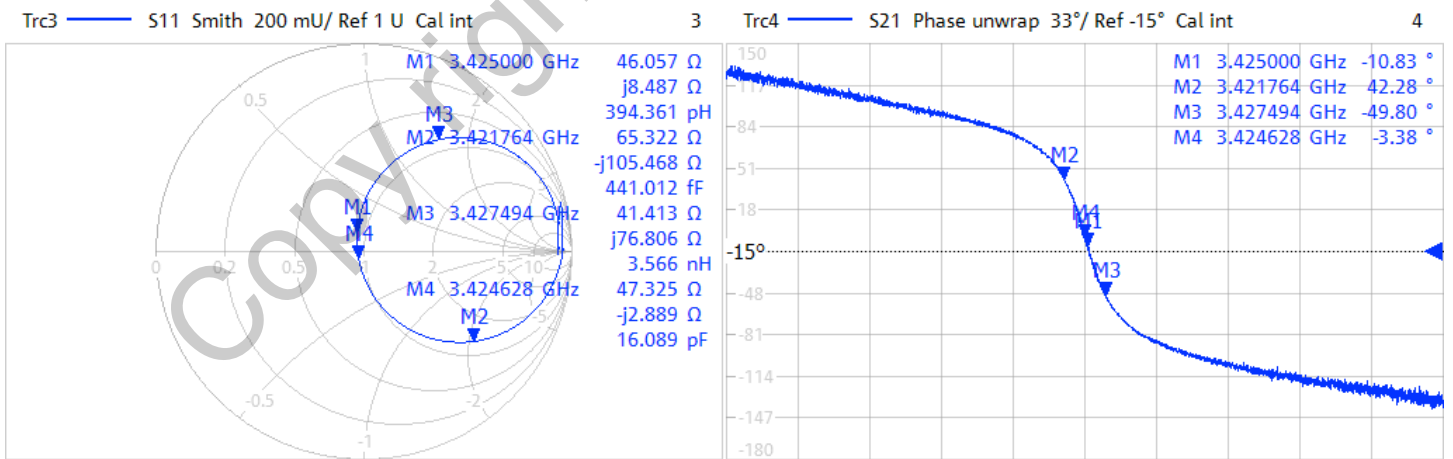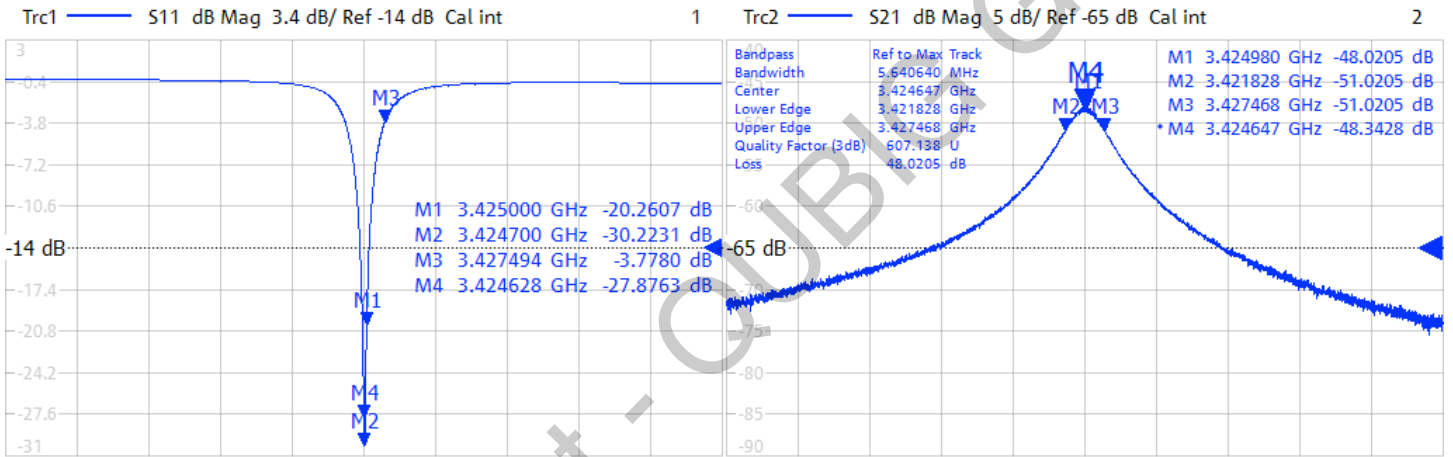

Handling instructions

- Input laser polarization must be aligned with respect to the white markers on the housing
- Please handle device carefully. Avoid shock. Don't drop.
- After turn on the resonance frequency might drift slightly with applied RF power. Please compensate by tuning the RF drive frequency until steady-state (~min).

Package drawing

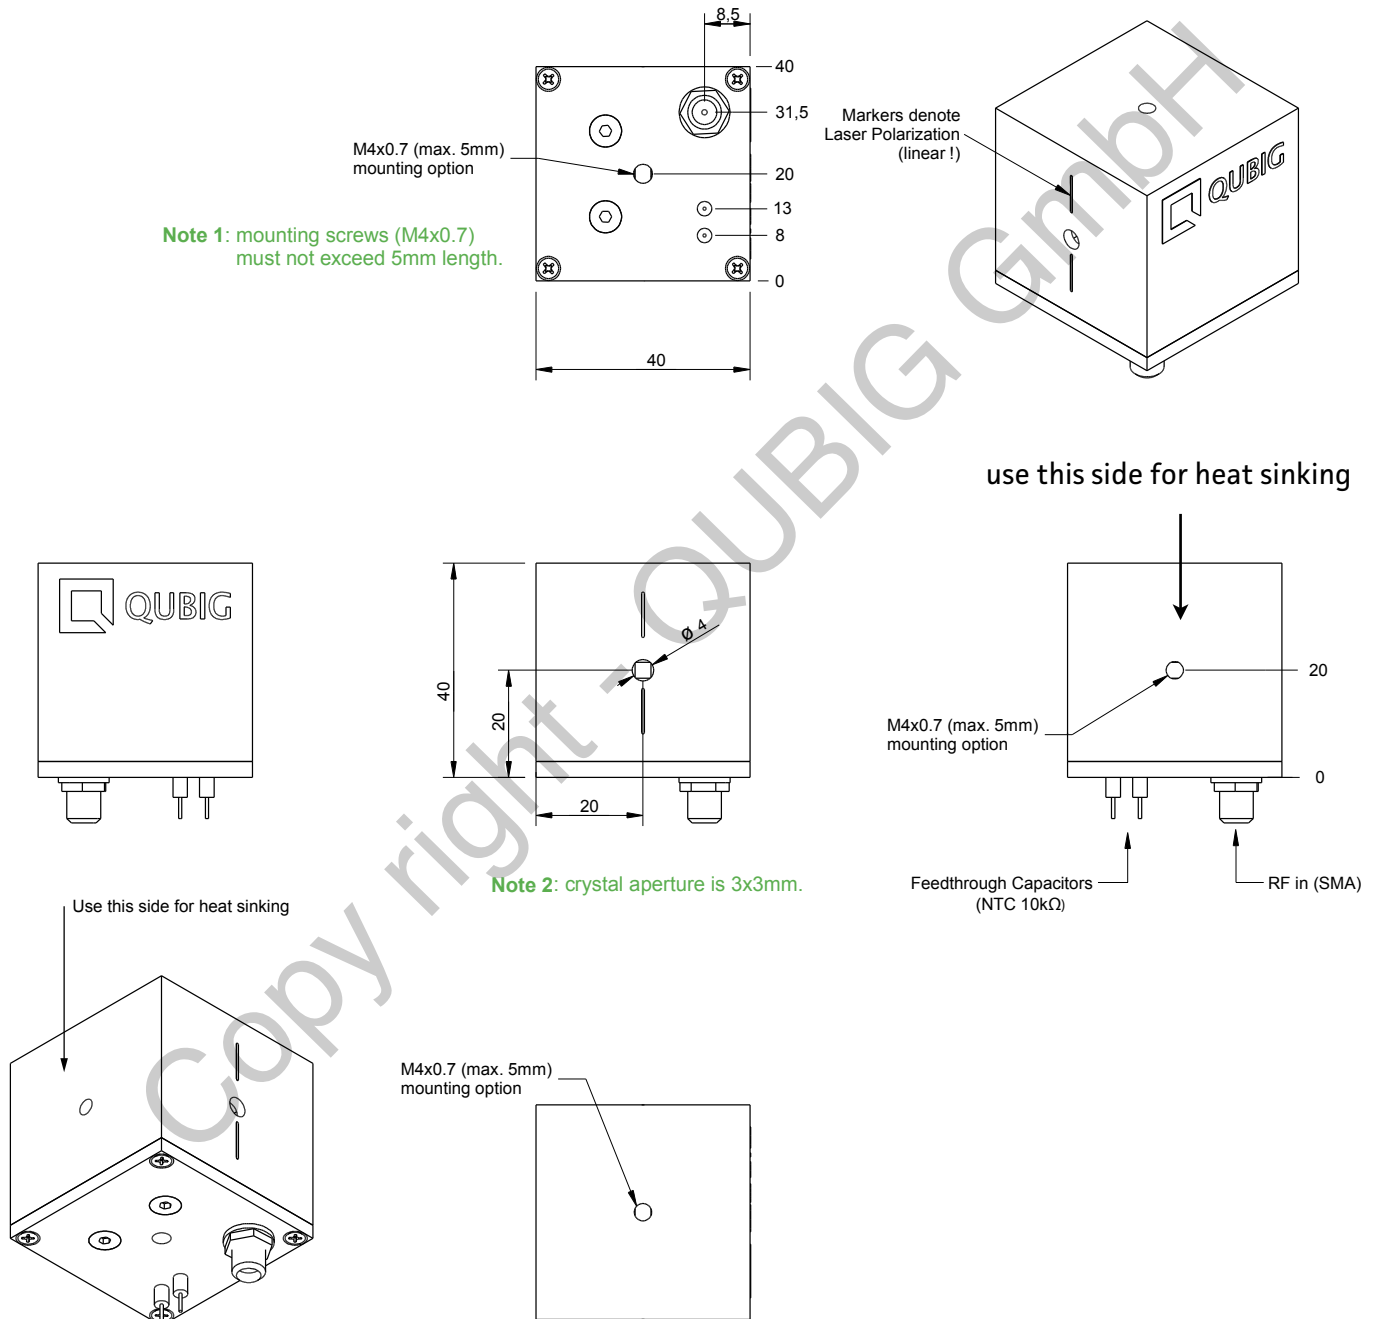

Tested by:

Tel: +49 89 2302 9101
 Fax: +49 89 2302 9102
 eMail: mail@qubig.com
 web: www.qubig.com

Qubig GmbH
 Balanstr. 57
 81541 Munich
 Germany